

MBX 18/7 T4 0,25kW

Series general data MBX



MANUFACTURING FEATURES

- Rolling steel sheet housing.
 - Completely joined or welded housing.
 - Single inlet forward curved impeller made of aluminium sheet.
 - Epoxy powder finishing coat.
 - Inlet sparkproof ring made of copper or aluminium.
 - Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. ATEX certified EEx-d.
- Manufactured with standard voltages: 230V 50Hz in single phase motors and 230/400V 50Hz in three phase motors up to 4kW, and 400/690V 50Hz for higher powers.

APPLICATIONS

- Designed for inline installation, they are suitable for:
- General ventilation in closed environments classified as ATEX zone 2 or 22.
 - Maximum air working temperature from -20°C to 80°C.

UNDER REQUEST


- 60Hz fans and special voltages.
- Special ATEX executions.

In compliance with the 94/9/CE Directive. ATEX II2G built. Certified II3G with certified ATEX EEx-d II2G motor for areas 2 (gas) or 22 (dust).

Series accessories MBX



Characteristic curve

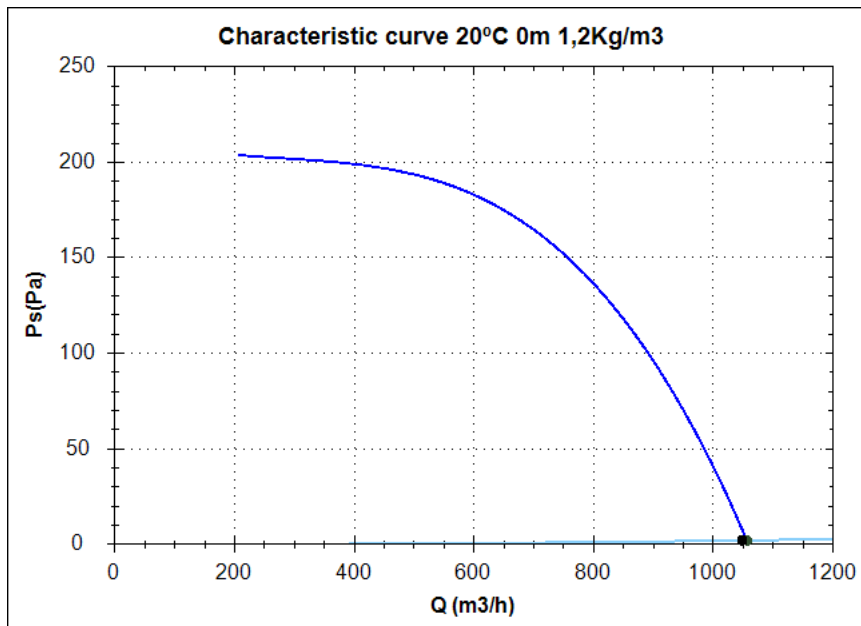

Design point

Q (m ³ /h)	1048,23
Ps(Pa)	2,14

Service point

Impeller rpm	1400
Max. temp.(°C)	130
Q (m ³ /h)	1056,32
Ps(Pa)	2,17
Pd(Pa)	211,81
Pt(Pa)	213,98
Air speed(m/s)	18,79
SWL dB(A)	82 (INLET)
SPL dB(A)	67 (INLET)
Distance(m)	1,5

Technical data

Impeller rpm	1400
Motor rpm	1400
Approx. weight(kg)	10
Maximum flow rate(m ³ /h)	1070


Power(kW)	0,25
Imax 230V(A)	1,44
Imax 400V(A)	0,83
Imax 690V(A)	-

MBX 18/7 T4 0,25kW

Acoustics to the service point (INLET)


Power dB(A)

63 Hz	51
125 Hz	64
250 Hz	70
500 Hz	71
1000 Hz	76
2000 Hz	77
4000 Hz	73
8000 Hz	70
Total dB(A)	82

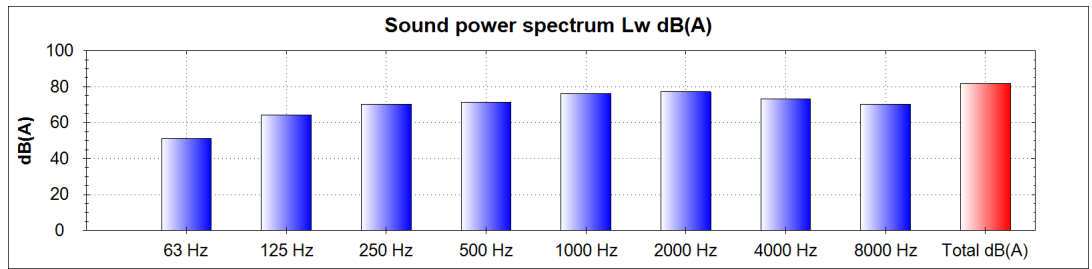


Pressure dB(A) [1,5 m]

63 Hz	37
125 Hz	50
250 Hz	56
500 Hz	57
1000 Hz	62
2000 Hz	63
4000 Hz	59
8000 Hz	56
Total dB(A)	67

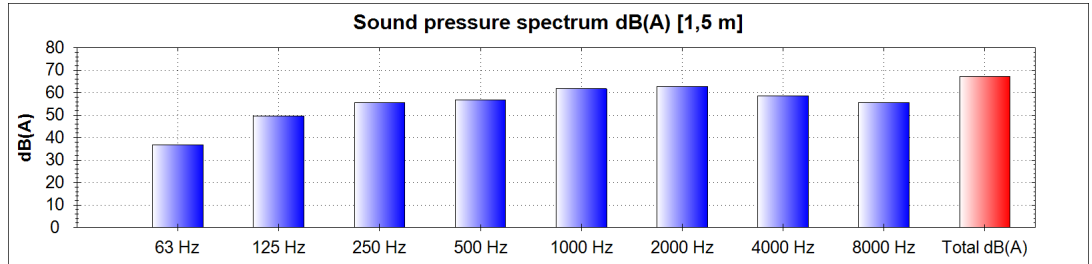

dimensions diagram

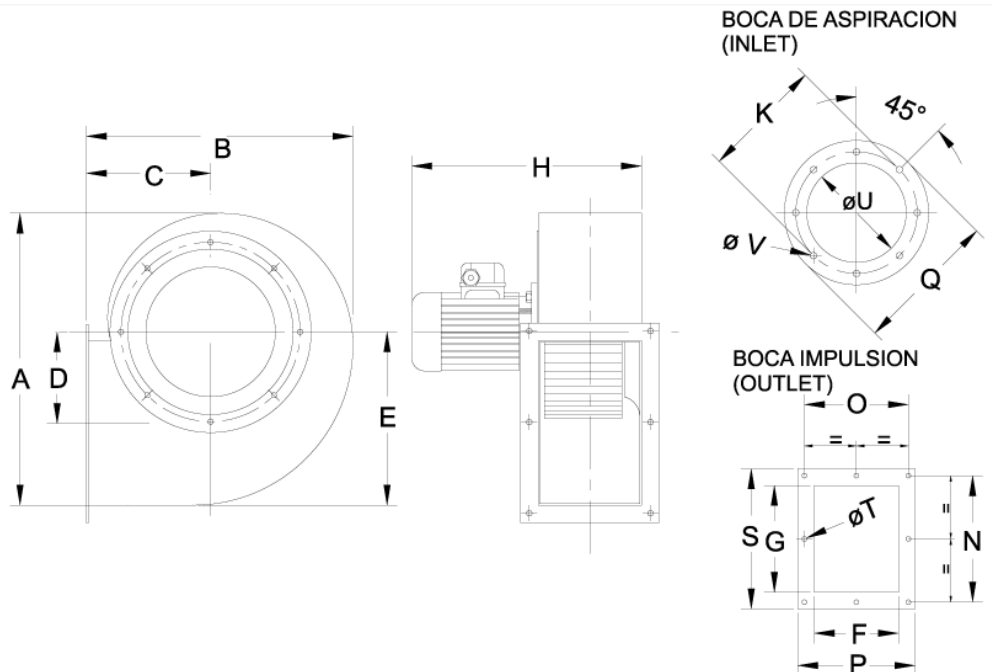

Dimensions (mm)

A=347	B=302	C=128	D=133	E=203	F=115	G=140	H=355	K=214	N=169	O=146	P=169
Q=237	S=192	T∅=9	U∅=141	V∅=9							

Wiring diagram

