DS-2CE16C2T-IT3

Key Features

- 1.3 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 40m IR distance
- IP66 weatherproof

Specification

Model / Parameter	DS-2CE16C2T-IT3
	Turbo HD720p EXIR Bullet Camera
Camera	
Image Sensor	1.3MP CMOS Image Sensor
Effective Pixels	1280(H)*960(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm), 36°(8mm), 23°(12mm), 17.9°(16mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 180°, Rotation: 0 - 360°
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	＞62dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)

©2006 – 2014 by HIKVISION. All rights reserved.

Power Supply	12V DC±15%
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 40m
Dimensions	94.6×83×210.8mm(3.72”×3.27”×8.30”)
Weight	700 g (1.54 lbs)

Order Model

DS-2CE16C2T-IT3

Dimension

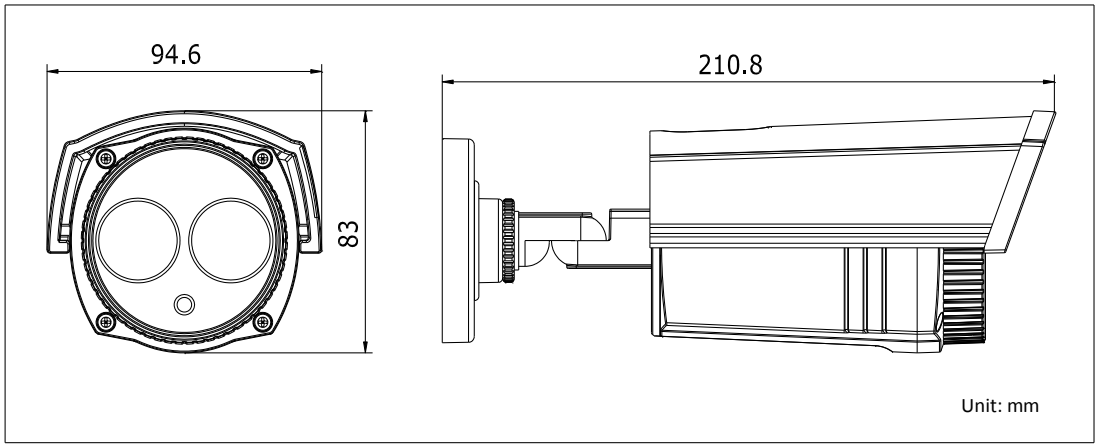

Accessary

DS-1280ZJ-XS
Junction box

DS-1H18
Video Balun

DS-TT-X41T
TVI Tester

©2006 – 2014 by HIKVISION. All rights reserved.